



New tangential tool

TCM-4

Overview of enhancements

© Copyright

ECOCAM CNC - Inh. R. Skowron

All previous versions lose their validity with this document. The information in this document is subject to change without notice. All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording or otherwise, without the express written permission of the copyright owner. Although every care has been taken to avoid mistakes or printing errors, these cannot be ruled out. We would be grateful for any suggestions for improvements or information on possible mistakes or unclear formulation. 16.11.2015

Overview of enhancements:

Since it's our always intention to build the best possible products we decided to launch a new advanced generation of tangential tools following an intensive period of development and testing.

The new generation of tools will be compatible with the previous one concerning the most important facts:

- I. The outside dimensions and the fixing points have not been changed.
- II. The integrated new electronic system is compatible with the previous one.
- III. All accessories and blades are compatible with the new system.

The main facts are:

1.) The most important improvement refers to the new compound axis that combines a hollow steel axis with an aluminium inlay for the fixation of the blade. The new axis of the TCM-4 has nearly the same weight like the old one but it's more robust. Furthermore the new axis is guided by precise ball bearings. Axial and torsional stiffness as well as wear resistance are optimized.




- 2.) A new solid guidance jacket for the tangential axis minimizes circumferential backlash.
- 3.) The main housing is equipped with a new kind of precise composite slide bearings for the tangential axis. Radial stiffness as well as wear resistance are optimized.

4.) The new internal electronic system is equipped with a reverse polarity protection and an optical display for the working status.



5.) The TCM-4 includes an internal voltage regulator and stabilizer. Its possible to supply the sensor electronics within a range of 6-24V DC. The previous electronic system had to be connected to 12V DC.

6.) The new system is equipped with a signal amplifier that generates a clearly defined digital signal for the reference position of the tangential axis. Concerning this point the new system is more sophisticated than the previous one but completely compatible. The diagram shows the signal of a turning system captured by an oscilloscope.

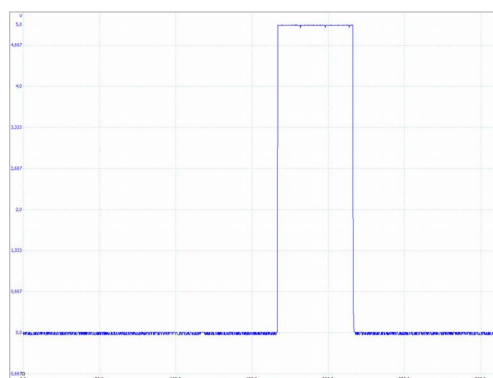

7.) A new 2-phase high-torque stepper motor with a full step angle of 0.9° (= 400 steps per revolution) ensures precise positioning and strong holding force.

8.) A new kind of industrial heavy duty connectors simplifies the wire assembling and improves the mechanical stability of the cable connection.



- 9.) We have chosen a cable connecting system that allows to use two different types of wire connection: crimping and soldering.

In both cases it's possible to handle and connect single wires what makes the assembling much more convenient. It's not necessary to solder within a very limited space in case the single contacts would be fix connected with the housing.



- 10.) The systems heat dissipation performance has been improved due to the new kind of coating for body and housing.

